Tow-Type 314 & 414



(Paver shown with optional equipment)

What your looking for: Productivity, Reliability, Cost Effective

KEY FEATURES

- Full width screed with paving widths from 4 to 14 feet.
- Dual operator's station


- Hydraulic tow arm hookup
- · Dual hopper gates

PAVMASTER by GILCREST

JMG Equipment Company 509 East Second Street Holden, MO 64040 Ph: (816) 732-5543 Fax: (816) 732-5544

Email: Info@jmgequipment.com www.jmgequipment.com

CTANDADD

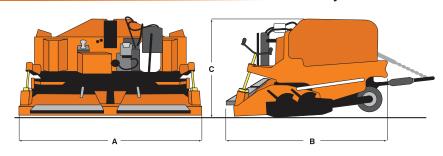

MODEL	POWER-HP	<u>AUGERS</u>	<u>WINGS</u>	PAVING WIDTH/DEPTH	HOPPER	<u>WEIGHT</u>	DIMENS	IONS IN IN	ICHES
314	20	EXTENSION MOUNTED	HYDRAULIC	4-14 FT / 6IN	FIXED- 3 TON	4100 LBS	A 102	В 75	C 60
414	20	EXTENSION MOUNTED	HYDRAULIC	4-14 FT / 6IN	FIXED- 3 TON	4300 LBS			

CTANDADD

314 TOW TYPE PAVER

414 TOW TYPE PAVER

STANDARD	STANDARD				
☐ 20 Hp propane fueled engine	☐ 20 Hp propane fueled engine				
☐ Foam filled pneumatic tires 5.39 x 4.50 x 6 Ply (Qty-8)	☐ Foam filled pneumatic tires 5.39 x 4.50 x 6 Ply (Qty-8)				
☐ Hydraulic screed extensions	☐ Hydraulic screed extensions				
☐ Hydraulic screed lift	☐ Hydraulic screed lift				
☐ Dual 4ft hydraulic hopper gates	☐ Dual 4ft hydraulic hopper gates				
□ 3" Screed Crown/Invert	☐ 3" Screed Crown/Invert				
☐ Propane heated bolt on 1/4" Hardox 450 main and extension wear plates	Propane heated bolt on 1/4" Hardox450 main and extension wear plates				
☐ Back-up hydraulic hand pumps	☐ Back-up hydraulic hand pumps				
☐ Hydraulic tow arm hookup	☐ Hydraulic tow arm hookup				
□ Solvent washdown tank	□ Solvent washdown tank				
	☐ Back-up DC powered hydraulic pump				
	☐ Hydraulic screed depth adjustment				
Optional Equipment Ditch Plates	Optional Equipment Ditch Plates				
☐ Hard Rubber Tires 12 x 5 x 5.25 (Qty- 8)	☐ Hard Rubber Tires 12 x 5 x 5.25 (Qty- 8)				
☐ Custom Paint	□ Custom Paint We're Back!				